

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number  
**WO 01/01681 A1**

(51) International Patent Classification<sup>7</sup>: H04N 5/85, 9/804

(21) International Application Number: PCT/EP00/05888

(22) International Filing Date: 23 June 2000 (23.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
99202060.2 25 June 1999 (25.06.1999) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DE HAAN, Wiebe [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: DE VRIES, Jan; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECORDING INCOMPLETE VIDEO STREAMS

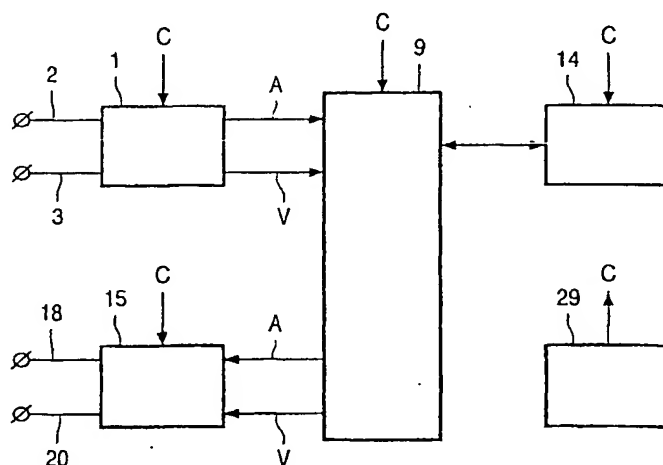

(57) Abstract: A method of recording an encoded bit stream, said encoded bit stream representing a plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc. The method comprising recording video objects comprising a sequence of contiguously recorded cells, each cell comprising a unique cell identification number within a video object, recording a playback sequence of cells defining a playable program chain of cells, wherein said sequence comprises references to the cell identification numbers and recording navigation data within said cells comprising an end time of presentation of the corresponding video object. The method further comprises recording at the end of a video object a dummy cell that is not being referenced by a playback sequence.

WO 01/01681 A1

## RECORDING INCOMPLETE VIDEO STREAMS

## FIELD OF THE INVENTION

The invention relates to a method for recording encoded information signals as recited in the preamble of claim 1 on a disc like record carrier, such as an optically readable disc. The invention further relates to a recording apparatus for performing the method.

5

## BACKGROUND OF THE INVENTION

The DVD-Video format for optically readable discs is defined in the DVD Specifications for Read-Only Disc, part 3: Video Specifications (version 1.0, August 1996). Relevant parts therefrom are being disclosed in for instance European Patent Application EP 724 264 and US Patent 5 784 528, respectively document D1 and D2 in the list of referred documents that can be found at the end of this description. Both documents are incorporated by reference herein.

The DVD-Video format as defined in the above mentioned Specifications for READ-Only Disc and disclosed in D1 and D2 was created for storing movies and other video content on read-only DVD media. Some of the features of the DVD-Video format make it less suitable for real-time recording applications.

However, it is desirable to create and record video streams and associated data structures on rewritable media in real time which are should preferably be almost identical to the structures defined in the DVD-Video format. Such rewritable discs should be play back compatible with the majority of the installed base of consumer DVD-Video players. The method according to the invention describes a novel and inventive format for DVD-Video compatible real-time recording of video streams, referred to hereinafter to as Real Time DVD Video Recording or shortly DVD-Video Recording. The format defined is intended for home video recording on an optical medium which is playback compatible with DVD-Video players.

The above-mentioned DVD-Video format demands that data for a VTS be allocated contiguously. This gives all kinds of problems when part of the data is overwritten with new recordings:

The Video End Presentation Time of a current Video Object (VOB) is one of the parameters incorporated in each Navigation Pack (NV\_PCK) in a stream. This Video End Presentation Time defines the end presentation time of the corresponding Video Object. However, when real time recording, this time is not known in advance. Including or updating afterward proves to be difficult and time consuming. Therefore a time is chosen in advance that a player will never reach. However, a problem will arise when reaching the end of Video Object, while the end presentation time points to a different time. This is for a player contrary information and may lead to an player error.

## 10 OBJECT AND SUMMARY OF THE INVENTION

In consequence, amongst other things, it is an object of the invention to obviate the above-mentioned disadvantages. According to one of its aspects a method of recording to the invention is characterized as recited in the characterizing part of claim 1.

As a player now recognizes a different cell that is not being referenced in the program chain, the player will know that the end of this program chain is being reached. The player will stop and never notice that the video object is not complete.

Further advantageous aspects of the invention are recited in other, dependent claims.

## 20 BRIEF DESCRIPTION OF THE DRAWINGS

These and further aspects and advantages of the invention will be apparent from and elucidated in more detail hereinafter with reference to the disclosure of preferred embodiments, in particular with reference to the appended figures in which,

Fig. 1 illustrates the logical data structure of a DVD disc corresponding to an embodiment for DVD Video Recording according to the invention;

Fig. 2 illustrates more in detail the structure of the Video Manager area (VMG) of Fig. 1;

Fig. 3 illustrates more in detail the structure of the Video Title Set Information area (VTSI) of Fig. 1;

Fig. 4 illustrates the structure of the Video Manager Information Management Table (VTSMAT) of Fig. 2;

Fig. 5 illustrates the structure of the Program Chain Information area (PGCI);

Fig. 6 shows an example of finding a Titles Program Chain Information (PGCI);

Fig. 7 shows a recording apparatus according to a first embodiment of the invention, the respective units therefrom being illustrated in more detail in the following figures of which

Fig. 8 shows an A/V input unit;

5 Fig. 9 shows a CODEC unit;

Fig. 10 shows an A/V output unit;

Fig. 11 shows a drive unit, and

Fig. 12 shows a system control unit.

## 10 DESCRIPTION OF THE EMBODIMENTS

The data structure to be disclosed hereafter explains the DVD-Video compatibility behind the Real-Time Video Recording Format and specifies how it should be used by recorders to create DVD-Video playback compatible discs.

15 To overcome limitations for real-time recording of the DVD-Video format for read-only discs, a number of changes have been made to the data organization and the use of some of the recording parameters in the real-time data stream.

The use of Titles and Menus is restricted to improve exchangeability of rewritable discs between recorders. In addition to this, strict rules are defined for Play Lists, 20 which can be created by the user to define playback sequences of pieces from the recorded Titles.

First a list of definitions is given.

### **Access unit**

25 Coded representation of a presentation unit. See ISO/IEC 13818-1 related to MPEG-2 systems, document D3 in the list of referred documents that can be found at the end of this description, for a more detailed definition of MPEG audio and video access units.

### **Buffer Cell**

30 Last Cell of a Video Object (VOB) containing just one Video Object Unit (VOBU). The Buffer Cell is not used by any Program Chain (PCGC). The Cell ID of a Buffer Cell is equal to 255.

### **Cell**

Sequence of one or more Video Object Units (VOBU). The first VOB of a Cell shall contain video data. Cells are the basic presentation units for the Program Chains (PGC)

## 5 Chapter

Subdivision of a Title. Other word for Part\_of\_Title (PTT).

### DVD-VR Format

Short for Video Format Specifications for Real-Time DVD-Video Recording.

## 10 DVD-Video format for read-only discs

Format as specified in the DVD specifications for Read-Only Disc- Part 3: Video Specifications (version 1.0, August 1996), elements of which are being disclosed in D1 and D2.

## 15 DVD-Video format for rewritable discs

Format of DVD-Video related structures with the modifications specified in this disclosure.

### Elementary stream

20 An elementary stream is a generic term for a sequence of coded video, coded audio, coded graphics or other access units that can be correctly decoded by a hypothetical decoder operating without special control from an external controller.

### Free Space

25 Recording which is represented by a Free Space Title in the Title Search Pointer Table. If the last Recording is free space, it is not represented in this table.

### Free Space Title

30 Full Title or Play List Title which cannot be played back as the related Program Chain Information contains a pre-command to prevent this. Time\_Play(), Time\_Search(), PTT\_Play() and PTT\_Search() for a Free Space Title are blocked. The Cell information in the Program Chain of a Free Space Title may not be reliable.

### Full Title

Title representing one Recording.

When a Full Title is played, all complete Cells (except the Buffer Cells) contained in the Recording are played in the order of data allocation in the VTS Title VOBS.

5 Full Titles may be accessible via the Title Menu.

### **Group of Pictures (GOP)**

Series of coded pictures starting with a GOP-header followed by an intra coded picture. The GOP represents up to 36 display fields at a rate of 59.94 Hz, or 30 fields  
10 at a rate of 50 Hz.

### **MPEG-2 Program Stream (MPEG-2 PS)**

Program Stream as defined in ISO/IEC 13818-1 related to MPEG-2 systems, document D3 in the list of referred documents that can be found at the end of this description.  
15

### **Multiplexed stream**

A multiplexed stream is a single bit-stream, combining one or several elementary streams that can be played in synchronism.

### **20 Play List (or Play List Title)**

Title representing a play back sequence of Cells from one Recording. Play Lists are accessible via the Title Menu.

### **Program Chain (PGC)**

25 Playback sequence of Cells for the presentation of a Menu or a Title.

Fig. 7 shows a recording apparatus according to a first embodiment of the invention. The recording apparatus is composed of several units. One unit is the A/V input unit 1. The A/V input unit 1 receives image and sound signals at antenna input terminal 2 and  
30 an external sound/image input terminal 3. The antenna input terminal 2 is adapted to receive broadcasted modulated A/V signals transmitted by either satellite, terrestrial or cable source. The external sound/image input terminal 3 is adapted to receive a non modulated audio signal or a non-modulated video signals generated directly by respectively an audio or a video source.

Fig. 8 illustrates the A/V input unit 1 in more detail. A tuner 5, which is connected to the antenna input terminal 2, demodulates the modulated A/V antenna signals and outputs the demodulated signals to a suitable A/V demultiplexing unit 6 for separating audio signals from video signals. An audio A/D converter unit 7 outputs a digital audio signal A and a NTSC/PAL/SECAM decoding unit 8, comprising a video A/D converter, outputs a digital video signal V. These signals A and V are outputted to an encoding/decoding unit 9, which is illustrated in more detail in Fig. 9. The encoding/decoding unit 9 compresses and encodes the signals A and V, respectively by an audio encoder 10 and a video encoder 11, converts them to a multiplexed and compressed stream conforming to Video Recording specifications, employing a multiplexer 12. To this purpose the audio encoder 10 and video encoder 11 are adapted to perform source compression according to a specific standard for compression, such as for example MPEG-2 for audio and video.

The compressed and multiplexed stream is submitted via a track buffer 13, which absorbs rate fluctuations stemming from intermittent recording and data reproduction from a disc, to a drive unit 14. The encoding/and decoding unit 9 also expands a compressed stream read from a recording medium by the drive unit 14 and outputs separately an audio signal A and a video signal V to the A/V output unit 15. To this purpose, the encoding/decoding unit 9 comprises a suitable A/V decoder 16 for decoding the compressed audio and video source signals.

The A/V output unit 15, which is illustrated in more detail in Fig. 10, comprises an audio D/A converter 17 for outputting sound signals to an external sound output terminal 18. The A/V output unit 15 further comprises a video encoder - D/A converter unit 19 for outputting video signals to an external image output terminal 20.

Fig. 11 illustrates the drive unit 14 in more detail. This unit 14 receives the compressed stream generated by the encoding/decoding unit 9, and adds an error-correction code by a suitable error correction processing unit 21 to the stream. Next a channel modulation/demodulation unit 22 converts the stream with error-correction code to channel bits adapted for recording on a recording medium 23. In case of a DVD-disc the EFM+ modulation scheme is being applied. Recording and reading in case of a recording medium 23 of the optical type, is performed by a laser comprised in an optical head unit 25. A laser power control unit 24 is controlling the laser. Reflected signals from the recording medium 23 are being converted by an amplifier and waveform equalizer circuit 26 into two-value signals. The resultant compressed stream is further demodulated by the

modulating/demodulation unit 22, error corrected by the error correction processing unit 21 and outputted to the encoding/decoding unit 9 via track buffer 13.

A servo circuit 27, connected to the amplifier and waveform equalizer circuit 26, controls the positioning of the optical head unit 25 relative to the recording medium 23 and the rotational velocity of the recording medium 23 by controlling rotational driving means 28.

A system control unit 29, as shown in Fig. 12, controls each block and perform file control, control information management and track buffer control. To this purpose a system control processing unit 30 is provided that is being connected to memory means 31 loaded with a suitable operation system. Operator input means 32 and operator output means 33 are connected to the memory means 31. The operator input means 32 comprising for instance keying means and the operator output means comprising display means.

#### 15    **Real Title**

Full Title or Play List Title which is not a Free Space Title.

#### **Recording**

Contiguous piece of the VTS Title VOBS, enclosing an integer number of MPEG-2 PS packs.

The VTS Title VOBS is partitioned into adjacent Recordings which do not necessarily coincide with the VOBs in the VOBS.

#### 25    **Title**

User accessible unit listed in the Title Search Pointer Table.

#### **Title Menu**

Menu which gives the user access to Play Lists and optionally to Full Titles.

#### 30    **Title Search Pointer Table**

Table in the Video Manager listing all available Play Lists and Full Titles on the disc. It is a starting point for finding the data which is relevant for playing back a Title.

**Video Manager (VMG)**

DVD-Video data structures containing information about the recorded video data and the Title Menu. The Title Search Pointer Table is one of the elements of the Video Manager.

5

**Video Object (VOB)**

A Video Object is (a part of) a sequence of contiguously recorded Cells, together constituting (a part of) an MPEG-2 Program Stream.

10

An integer number of MPEG-2 Program Stream packs may be missing from the beginning of the first Cell of the VOB, if this Cell is not used by any Title. The last Cell of a VOB is a Buffer Cell.

15

A VOB shall contain one video elementary stream. Gaps in the video stream are allowed under conditions specified by the DVD-Video specifications.

20

According to the DVD-Video specifications a VOB may also contain up to eight Audio streams (in elementary audio streams and/or in private streams) and up to 32 Sub-picture streams. The DVD-VR format only allows one Audio stream and one Sub-picture stream within the same VOB.

**Video Object Unit (VOBU)**

Integer number of MPEG-2 Program Stream packs representing a presentation period between 0.4 and 1.0 seconds.

25

The last VOBU of a Cell has a maximum presentation period of 1.2 seconds. When the VOBU contains Video, the video data consists of an integer number of GOPs and starts with a sequence header, a GOP header and an intra coded picture.

30

A Sub-picture Unit is optional in a VOBU and cannot cross VOBU boundaries. The SPU's associated validity period ends at or before the end presentation time of the VOBU.

## Video Object Set (VOBS)

Collection of contiguously recorded VOBs.

VOBs which are used for the menus are stored in the Video Manager VOBS (VMGM\_VOBS). VOBs which are used for the Titles are stored in the VTS Title VOBS (VTSTT\_VOBS).

Fig.1 shows the general data structure in accordance with the Real-Time Video Recording format. The data structure comprises a Lead-In area (LI), a Volume (VOL) and File System area (FS), a Video Manager area (VMG), one Video Title Set (VTS), an area reserved for other structures (OTHER) and a Lead-Out area (LO) as known from the DVD-ROM data structure. Not specifically shown in Fig. 1 is Presentation Control Information (PCI) and Data Search Information (DSI) within the Video Object Set for VTS Titles (VTSTT\_VOBS), both dispersed in the Navigation Packs (NV\_PCK) of each Video Object Unit (VOBU).

The data organization according to the Real-Time Video Recording format will first be discussed in general.

With respect to the Video Manager (VMG) the following is remarked. The Video Manager (VMG) shall contain a Title Menu. Consequently a Video Object Set for Video Manager Menu (VMGM\_VOBS) is mandatory.

With respect to the Video Title Sets (VTS) the following is remarked. The data structure on a disc contains only one Video Title Set (VTS). The Root Menu shall contain a dummy Program Chain (PGC) with a pre-command calling the Title Menu. No other Video Title Set (VTS) menus shall be present on the disc. Consequently the Video Title Set (VTS) does not contain a Video Object Set for a Video Title Set Menu (VTSM\_VOBS). The Video Object Set for Video Title Set Titles (VTSTT\_VOBS) of the Video Title Set (VTS) contains the recorded video content.

With respect to the Video Object Set (VOBS), the Video Objects (VOBs) and Cells, the following is remarked. A Video Object (VOB) is (a part of) a sequence of contiguously recorded Cells, together constituting (a part of) an MPEG-2 Program Stream as defined in D4. An integer number of MPEG-2 Program Stream packs may be missing from the beginning of the first Cell of the Video Object (VOB), if this Cell is not used by any Title. The last Cell of a Video Object (VOB) is a Buffer Cell, which is not used by any Title.. A Video Object Set (VOBS) is a collection of contiguously recorded Video Objects (VOBs). Video Objects (VOBs) and Cells on a rewritable disc are not fully compliant with the Video

Specifications for the DVD Read-Only Disc as disclosed in D2 and D4. The following exceptions are allowed or required:

- 1) The DVD-Video specification demands that a Video Object (VOB) starts with an System Clock Reference (SCR) equal to zero. This is not required for DVD-VR discs.
- 5 2) The Display of the video stream from one Video Object (VOB) does not have to start with a top field nor have to end with a bottom field.
- 3) The DVD-Video specification prescribes incremental numbering of Video Objects (VOBs) and Cells. When recording the disc for the first time that requirement can generally be met. However, when old recordings are (partly) overwritten, or when the  
10 user does editing, it may not be possible to maintain the incremental numbering. To overcome this problem, DVD-VR format requires that the Video Object Identification number (VOB ID) of all Video Object (VOBs) is equal to '1'. In addition to this, Cell ID numbers (except number 255) remain unique but they are allowed to be non sequential.
- 4) Video Objects (VOBs) and Cells contain Navigation packs (NV\_PCK) with forward  
15 references to facilitate forward search. Some of these forward references cannot be known at recording time and therefore must be encoded with values that make legacy playback devices behave in an acceptable way.
- 5) The Navigation packs (NV\_PCK) also contain a parameter specifying the presentation termination time of the last video frame of the Video Object (VOB). This parameter  
20 cannot be made correct in real time in all cases. To solve this problem a high number will be recorded for this parameter. A Buffer Cell at the end of a Video Object (VOB) guarantees that the end of a Video Object (VOB) is never reached during play back.

With respect to recordings, the following is remarked. The Video Object Set  
25 for Titles in a Video Title Set (VTSTT\_VOBS) can be partitioned into a collection of adjacent pieces, called Recordings, which do not necessarily coincide with the Video Objects (VOBs). Recordings enclose an integer number of MPEG-2 PS packs.

Recordings relate to the partitioning of the content as it is presented to the user.

30 With respect to Full Titles, Play Lists and Free Space, the following is remarked. For each Recording two One\_Sequential\_PGC\_Titles are created: one Full Title and one Play List. The Full Title defines play back of all complete Cells (except Buffer Cells) of a Recording in the order of allocation in the Video Object Set (VOBS). The Play List may be different from

the Full Title. If so it defines play back of a subset of the Cells which are played by the Full Title.

Full Titles and Play Lists are each represented as a Title in the Title Search  
5 Pointer Table in VMGI (TT\_SRPT) and as a Title Unit (TTU) in the Part\_of\_Title Search  
Pointer Table in the VTSI (VTS\_PTT\_SRPT). A Play List points to the same Program Chain  
(PGC) as the corresponding Full Title, unless a different Program Chain (PGC) is recorded  
for the Play List.

Full Titles and Play List Titles are Real Titles, unless they are tagged as Free  
10 Space. When the user deletes a Full Title, both the Full Title and the Play List in the Title  
Search Pointer Table (TT\_SRPT) are tagged as Free Space by setting a unique Playback  
Type value (TT\_PB\_TY). If two consecutive Full Titles are deleted, the entries in the Title  
Search Pointer Table (TT\_SRPT) shall be combined into one new Title. Also the related Play  
15 Lists are combined and tagged as Free Space. Free space that is available on the disc at the  
end of the VTS Title VOBS or beyond the boundaries of the VTS, is not reflected in the  
TT\_SRPT. Fig. 5 illustrates an example of finding a Title's PGCI.

Within Fig. 5 the following data structures are given: Title Play Back Type  
(TT\_PB-TY), Number of Part\_of\_Title (PTT\_Ns), VTS Title Number (VTS\_TTN),  
PGC\_Number (PGCN), Program Number (PGN), VTS Title Number (VTS\_TTN), Start  
20 Address of VTS Program Chain Information Table (VTS\_PGCI-SA), Program Chain  
Information Table (PGCIT), Number of Angles (AGL-Ns), Parent\_ID\_field for Title  
(TT\_PTL\_ID-FLD), VTS Number (VTSN) and Parent ID-field (PTL\_ID\_FLD).

Each Title (except for the last Play List Title and the last Full Title) is linked  
to the next Title by a LinkPGCN instruction in the associated Program Chain Information  
25 (PGCI). The Program Chain Information (PGCI) of the last Play List and the last Full Title  
contains a CallSS to the Title Menu. If the Title is tagged as Free Space, this instruction is  
stored as a pre-command in the Program Chain Information (PGCI). Otherwise the  
instruction is stored as a post-command.

The number of Full Titles on a DVD-VR disc is equal to the number of Play  
30 Lists with a maximum of 49. Titles can be sub-divided into a maximum of 99 Chapters  
(Part\_of\_Titles). The maximum number of Chapters for all Full Titles on one disc is 254.

In the following the restrictions and modifications compared to the read-only  
format will be given.

As already disclosed with reference to Fig. 1, exactly Video Title Set is recorded on disc. Fig. 2 illustrates the data structure of Video Manager General Information (VMGI) within the Video Manager (VMG) area as shown in Fig.1. As in Fig.1, the Presentation Control Information (PCI) and Data Search Information (DSI) are not shown in Fig2, although this information is dispersed in corresponding Navigation Packs (NV\_PCK) in each Video Object Unit (VOBU) of the Video Object Set for the Video Manager Menu (VMGM\_VOBS).

With respect to the Video Manager Information Management Table (VMGI\_MAT), the first 8 bytes of the Provider Unique ID (PVR\_ID) contains the string 'DVD-VR01'. The First Play Program Chain (FP\_PGC) contains just a JumpSS to the Title Menu as a pre-command.

The Title Search Pointer Table (TT\_SRPT) consists of two sections of equal length. The first half contains pointers for N Play Lists and the second half contains pointers to N Full Titles. Play Lists as well as Full Titles are sorted in the order of incrementing start addresses of the first used Cell in the Video Object Set (VOBS). All Titles are One\_Sequential\_PGC\_Titles for which Time\_Play() and Time\_Search() are blocked. Part\_of\_Title\_Play() and Part\_of\_Title Search() shall be blocked for Titles which are associated with Free Space and shall not be blocked for other Titles. Table 1 lists allowed Playback Types as indicated by the Title\_Playback\_Type (TT\_PB\_TY) field.

Table 1 Allowed values of TT\_PB\_TY

Value of TT_PB_TY	Type of Title
0000 0101b	Real Title which is not the last Play List or not the last Full Title
0001 0101b	Real Title which is the last Play List or the last Full Title
0000 0111b	Free Space Title

#### The Video Manager Menu Program Chain Information Unit Table

- 5 (VMGM\_PGCI\_UT) is just linked to the Title Menu. There shall be only one Language Unit. The Video Manager Menu exists in this Language Unit.

Following the Video Title Set Attribute Table (VTS\_ATRT), the Video Manager Menu Cell Address Table (VMGM\_C\_ADT) is restricted to a maximum of 170 cells and the Video Manager Menu Video Object Unit Address Map

- 10 (VMGM\_VOBU\_ADMAP) to a maximum of 511 VOBUs. The remaining part of the Video Manager area (VMG) is occupied with the Video Manager Menu Video Object Set (VMGM\_VOBS) and the back up of the Video Manager Information (VMGI\_BUP).

- 15 With reference to Fig. 3, the Video Title Set Information (VTSI) will be discussed. As the Root Menu contains just a dummy Program Chain (PGC) and other menus are not allowed, the Video Title Set (VTS) Menus have no associated Video Object (VOB) data. Consequently the Cell Address Table of the Video Title Set Menu (VTSM\_C\_ADT) and the Address Map of the Video Object Unit of the Video Title Set (VTSM\_VOBU\_ADMAP) do not exist.

- 20 The Management Table of the Video Title Set Information (VTSI\_MAT) comprises the following area (not shown in the figure) :

- the VTS Video Attributes (VTS\_V\_ATR) (the video compression mode complies with MPEG-2),
- the number of Audio Streams (VTS\_AST\_Ns) describing the number of different audio stream attribute sets used in this VTS,
- 25 – the VTS Audio Stream Attribute Table (VTS\_AST\_ATRT) listing the different audio stream attribute sets which are defined (and may or may not be used) for this VTS. The PGCI for each Title defines which of the sets is actually used,
- the number of Sub-picture Streams (VTS\_SPST\_Ns) (set to one in this VTS) and

- the VTS Sub-picture Stream Attribute Table (VTS\_SPST\_ATRT) (all fields in this table are zero)

The Video Title Set Information (VTSI) further comprises further a Video Title Set Part\_of\_Title Search Pointer Table (VTS\_PTT\_SRPT) wherein the Title Units are recorded in the same order as Titles in Title Search Pointer (TT\_SRPT).

Next is present a Video Title Set Program Chain Information Table (VTS\_PGCIT). The number of Video Title Set Program Chain Information (VTS\_PGCI) search pointers is equal to the number of Titles in Title Search Pointer Table (TT\_SRPT). The search pointers are recorded in the same order as the Titles. All Program Chains (PGCs) are Entry PGCs with all bits zero for Block mode, Block type and Parental ID Field (PTL\_ID\_FLD). When a Play List is equal to the associated Full Title, their Start Address of Video Title Set Program Chain Information (VTS\_PGCI\_SA) values are identical.

With respect to the Video Title Set Menu Program Chain Information Unit Table (VTSM\_PGCI\_UT) the following is remarked. The number of Video Title Set Menu Language Units as specified in VTSM\_PGCI\_UTI shall be 1. There is exactly one Video Title Set Menu Language Unit Search Pointer (VTSM\_LU\_SRP). The Video Title Set Menu Existence field (VTSM\_EXST) shall contain the value (1000 0000b) to indicate that just the Root Menu exists. The Video Title Set Menu Language Unit (VTSM\_LU) contains just one Program Chain Information Search Pointer (VTSM\_PGCI\_SRP). The Video Title Set Menu Program Chain Category parameter (VTSM\_PGC\_CAT) for the Video Title Set Menu Program Chain (VTSM\_PGC) contains the value (8300 0000h) indicating that the associated Program Chain (PGC) is the Entry PGC for the Root Menu. There is exactly one Video Title Set Menu Program Chain Information (VTSM\_PGCI).

The Video Title Set Time Map Table (VTS\_TMAPT) contains Video Title Set Time Maps (VTS\_TMAPs) that are present for all Titles on the disc but do not contain any map entries.

With respect the Video Title Set Cell Address Table (VTS\_C\_ADT), the parameter containing the number of Video Object in the Video Title Set (VTS\_VOB\_Ns) contains the value '1'. It is noted that the VTS\_VOB\_Ns does not reflect the actual number of VOBs in the Video Object Set of a rewritable disc. It is set to 1 as the VOB ID number of all VOBs is set to '1'. All Video Title Set Cell Piece Information (VTS\_CPI) have the same value ('1') for the Video Title Set Video Object ID Number (VTS\_VOB\_IDN). Exactly 254 VTS\_CPI blocks are recorded with VTS\_C\_IDN starting from '1' and incrementing up to and including '254'. The Start Address and End Address of

the Video Title Set Cell Piece (VTS\_CP\_SA and VTS\_CP\_EA) of Cell Pieces which are not referenced by any PGC of a Real Title contain the value (0000 0000h). It is noted that Cell Pieces that are referenced by a PGC of a Free Space Title contain zero start and end addresses.

5                   With respect to The Video Title Set Video Object Unit Address Map (VTS\_VOBU\_ADMAP) it is remarked that all Video Object Unit (VOBU) start addresses of the VOBUs which are completely contained in VTSTT\_VOBS are listed here in ascending order. It is noted that VOBUs which are part of Free Space are also included in the VTS VOBUs Address Map.

10                   Next the structure of the Program Chain Information area (PGCI) for Title Program Chains will be given with reference to Fig. 5. This structure comprises a Program Chain General Information Area (PGC-GI), a Program Chain Command Table (PGC\_CMDT), a Cell Playback Information Table (C\_PBIT) and a Cell Position Information Table (C\_POSIT).

15                   With respect to the Program Chain General Information (PGC-GI) it is noted that exactly one of the Availability flags in the Program Chain Audio Stream Control Table (PGC\_AST\_CTLT) is set to (1b). When the  $i^{\text{th}}$  Availability flag is set, the  $i^{\text{th}}$  Audio stream parameter set defined for this Video Title Set (VTS) is valid for this Program Chain (PGC). The Decoding Audio stream number is always '0'.

20                   The availability flag of the first Program Chain Sub-picture Stream Control (PGC\_SPST\_CTLT) field in the Program Sub-picture Stream Control Table (PGC\_SPST\_CTLT) is set to (1b). All other bits of the Program Sub-picture Stream Control Table (PGC\_SPST\_CTLT) contain the value (0b).

25                   The Program (PG) Playback mode in the Program Chain Navigation Control (PGC\_NV\_CTLT) is set to sequential playback. The Still time value is set to no Still.

                  The PGC Command Table (PGC-CMDT) contains exactly three commands. According to this version of the specification only one command is actually used (for Title linking), the other two commands are NOP commands (0000 0000h). Which command is used for Title linking is defined in Table 2.

Table 2 Commands in PGC1

PGC associated with ...	contains ...	as a ...
Real Title which is not the last Play List or not the last Full Title in TT_SRPT	LinkPGCN to PGC of next Real Title	post-command
Real Title which is the last Play List or the last Full Title in TT_SRPT	CallSS to Title Menu	post-command
Free Space Title	LinkPGCN to PGC of next Real Title	pre-command

5                   With respect to Cell Playback Information Table (C\_PBIT): Cells are not part of an Angle Block and do not exist in an Interleaved Block.

                  With respect to the Cell Position Information Table (C\_POSIT): the Identification Numbers of the Video Objects of all Cells in the PGC contain the value '1'. It is noted that, on DVD-VR discs, all VOBs have the same VOB\_IDN.

10                  It is allowed that the Cell ID number of a Cell of which the Seamless playback flag set in Cell Playback Information, is not the same as the previous Cell ID number incremented by 1.

                  With respect to the Presentation Control Information (PCI) it is noted that modifying a Play List may require that a Cell is split into two new Cells. In that case all  
15 values of Cell Elapse Time (C\_ELTM in PCI\_GI) shall be updated in all PCI fields in the second Cell.

                  Additional data fields with respect to the DVD-Video format for Read-Only discs for carrying real-time stream attributes are given below.

                  The last reserved 32 bytes of the General Information of Presentation Control  
20 Information (PCI\_GI) are redefined in this specification as shown in table 3

Table 3 Redefinition of reserved fields at end of PCI\_GI

	Contents	Number of bytes
reserved	reserved	16 bytes
(8) PCI_GI_XI	PCI_GI Extension Information	1 byte
(9) RT_V_ATR	Video Attributes	1 byte
(10) RT_AST_ATR	Audio Stream Attributes	1 byte
reserved	reserved	13 bytes
	Total	32 bytes

PCI\_GI\_XI identifies the application and specifies the length of the extension.

- 5 If all bits in this byte are zero, also the bytes of PCI\_GI following this field are zero:

B7	b6	b5	b4	b3	b2	b1	b0
Application Identifier				Extension Length			

Application Identifier contains the value (0001b) if the stream attributes as defined in VTSI\_MAT for this VTS must be overruled by the real-time stream attributes.

- 10 Otherwise contains the value (0000b). The real-time stream attributes are valid from Start PTM until End PTM of the VOB in which this field is contained.

Extension Length defines the number of bytes for this extension following this field. It shall contain the value (0010b) if Application Identifier is (0001b). It contains the

- 15 value (0000b) if Application Identifier is (0000b).

RT\_V\_ATR describes the real-time Video stream attributes.

B7	b6	b5	b4	b3	b2	b1	b0
Aspect ratio	reserved		reserved	Source picture letter boxed	reserved	Film camera mode	

Aspect ratio, Source picture letterboxed and Film camera mode have meanings as defined in the DVD specifications for the Read\_Only Disc.

5 RS\_AST\_ATR describes the real-time Audio stream attributes:

B7	b6	b5	b4	b3	b2	b1	b0
reserved				Surround Type		reserved	

Surround Type as defined in the DVD Specifications of the Read-Only Disc.

10 With respect to Data Search Information (DSI) it is noted that all VOBs are allocated in Contiguous Blocks and there are no Angles.

With respect to the Data Search Information General Information (DSI\_GI) it is remarked that the Video Object ID number (VOB ID) number is always 1. Further there is no requirement that the Cell ID numbers are monotonically increasing from 1 in the Video Object. The following rules shall be applied for Cell ID:

- 15
- Cell ID is identical in all VOBUs belonging to the same Cell
  - Cells which are used by Real Titles are uniquely identified by their Cell ID.

It is noted that modifying a Play List may require that a Cell is split into two new Cells. In that case all values of Cell Elapse Time (C\_ELTM in DSI\_GI) shall be updated in all DSI fields in the second Cell.

20 With respect to Video Object, it is remarked that an integer number of MPEG-2 Program Stream packs may be missing from the beginning of the first Cell of the VOB, if this Cell is not used by any Title. The last Cell of a VOB is a Buffer Cell.

It is noted that seamless connections between VOBs are excluded.

25 Only one Audio stream is allowed within a VOB. The Audio decoding stream number is '0'.

Only one Sub-picture stream is allowed within a VOB. The Sub-picture decoding stream number is '0'. Data for a Sub-picture Unit (SPU) is fully contained in one VOB. The SPU validity period shall not start before the Start PTM of the VOB, nor shall it end later than the End PTM of the VOB.

30 The DVD-Video format for rewritable discs is not fully identical to the DVD-Video format for read-only discs. The differences are (1) in the rules for data allocation and (2) in some details of the navigation data in the real-time data streams. The first kind of

differences generally has no consequences for DVD-Video players. As a consequence of the second kind of differences in some cases trick mode behaviour of DVD-Video playback devices with rewritable discs may not be always exactly the same as with prerecorded discs. Manufacturers can improve compatibility between DVD-Video players and rewritable discs by following the guidelines given in the next.

With respect to VOBS Structures:

On rewritable DVD-Video discs some rules for the Video Object Set data structures are different from the rules for read-only discs. DVD-Video players will play back rewritable discs well when they are robust against:

- non-sequential numbering of VOBs in the VTSTT\_VOBS
- non-sequential numbering of Cells within a VOB
- the existence of remnants of partly overwritten Cells or other unused data in between “active” Cells
- modified rules for forward search pointers as defined next :

DVD-Video recorders are required to at least fill in correct forward pointers FWDI(n) for  $n \leq M$ . Forward pointers FWDI(n) with  $M < n \leq N$  contain the last correct value. For  $n > N$  forward pointers point to the end of the current Cell. The duration of a Cell on a rewritable disc is typically 60 seconds.

This means that for forward search functionality DVD-Video players can still rely on the FWDI pointers for the lower speeds (2x, 4x, 8x). For higher speeds, the player can still use the long distance FWDI pointers but in this case they point to the end of the current Cell. If accurate fast search speeds are desired, the speed can be adjusted by picking up intermediate pictures (e.g. by applying a FWDI(6) pointer) or by adapting the display period of the pictures.

Although the invention has been described with reference to preferred embodiments thereof, it is to be understood that these are not limitative examples. Thus, various modifications thereof may become apparent to those skilled in the art, without departing from the scope of the invention, as defined by the claims. The invention can be implemented by means of both hardware and software, and that several “means” may be represented by the same item of hardware. Further, the invention lies in each and every novel feature or combination of features. It is also remarked that the word ‘comprising’ does not exclude the presence of other elements or steps than those listed in a claim. Any reference signs do not limit the scope of the claims.

## LIST OF REFERRED DOCUMENTS

(D1) European Patent Application EP 724 264

(D2) US Patent 5 784 528

- 5 (D3) ISO/IEC 13818-1 : 1995 Information Technology – Generic Coding of moving pictures and associated audio information : Part 1 : Systems (MPEG2-systems)

## CLAIMS:

1. A method of recording an encoded bit stream, said encoded bit stream representing a plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc, said method comprising:
  - 5 recording video objects comprising a sequence of contiguously recorded cells, each cell comprising a unique cell identification number within a video object;  
recording a playback sequence of cells defining a playable program chain of cells, wherein said sequence comprises references to the cell identification numbers,  
recording navigation data within said cells comprising an end time of  
10 presentation of the corresponding video object,  
characterized by,  
recording at the end of a video object a dummy cell that is not being referenced by a playback sequence.
- 15 2. A method according to claim 1, characterized by,  
assigning an unique cell identification number to said dummy cell.
3. A method according to claim 1, characterized by,  
assigning a cell identification number to said dummy cell that differs from the  
20 identification number from the preceding cell.
4. A method according to claim 2 or 3, wherein said dummy cell may not be filled completely.
- 25 5. A method according to claim 4, wherein a cell, video object, a playback sequence, and end time of presentation corresponds respectively to a Cell, a Video Object (VOB), a Program Chain (PGC) and a Video Object Video End Presentation Time (VOB-VPTM) of the DVD Read Only Video Specification.

6. A method according to claim 5, wherein a dummy cell comprises only a Video Object Unit (VOBU) according to the DVD Read Only Video Specification.

7. A method according to claim 5, wherein a dummy cell comprises only a Navigation Pack (NV-PCK) according to the DVD Read Only Video Specification.

8. A recording apparatus for recording an encoded bit stream, representing a plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc, the recording apparatus comprises recording means adapted to record  
a sequence of contiguously recorded cells, each cell comprising a unique cell identification number within a video object,  
a playback sequence of cells defining a playable program chain of cells, wherein said sequence comprises references to the cell identification numbers,  
navigation data within said cells comprising an end time of presentation of the corresponding video object,  
characterized in that, the recording apparatus comprises  
system control means adapted to control the recordings means to record at the end of a video object a dummy cell that is not being referenced by a playback sequence.

9. A recording apparatus according to claim 8, characterized in that, the system control means are adapted to assign an unique cell identification number to said dummy cell for recording.

10. A recording apparatus according to claim 8, characterized in that, the system control means are adapted to assign a cell identification number to said dummy cell for recording that differs from the identification number from the preceding cell.

11. A recording apparatus according to claim 10 or 11, characterized in that, the system control means are adapted to control the recording means to record a dummy cell that may not be filled completely.

12. A recording apparatus according to claim 11 wherein a cell, video object, a playback sequence, and end time of presentation corresponds respectively to a Cell, a Video Object (VOB), a Program Chain (PGC) and a Video Object Video End Presentation Time (VOB-V-PTM) of the DVD Read Only Video Specification.

5 13. A recording apparatus according to claim 12, wherein a dummy cell comprises only a Video Object Unit (VOBU) according to the DVD Read Only Video Specification.

10 14. A recording apparatus according to claim 13, wherein a dummy cell comprises only a Navigation Pack (NV-PCK) according to the DVD Read Only Video Specification.

1/8

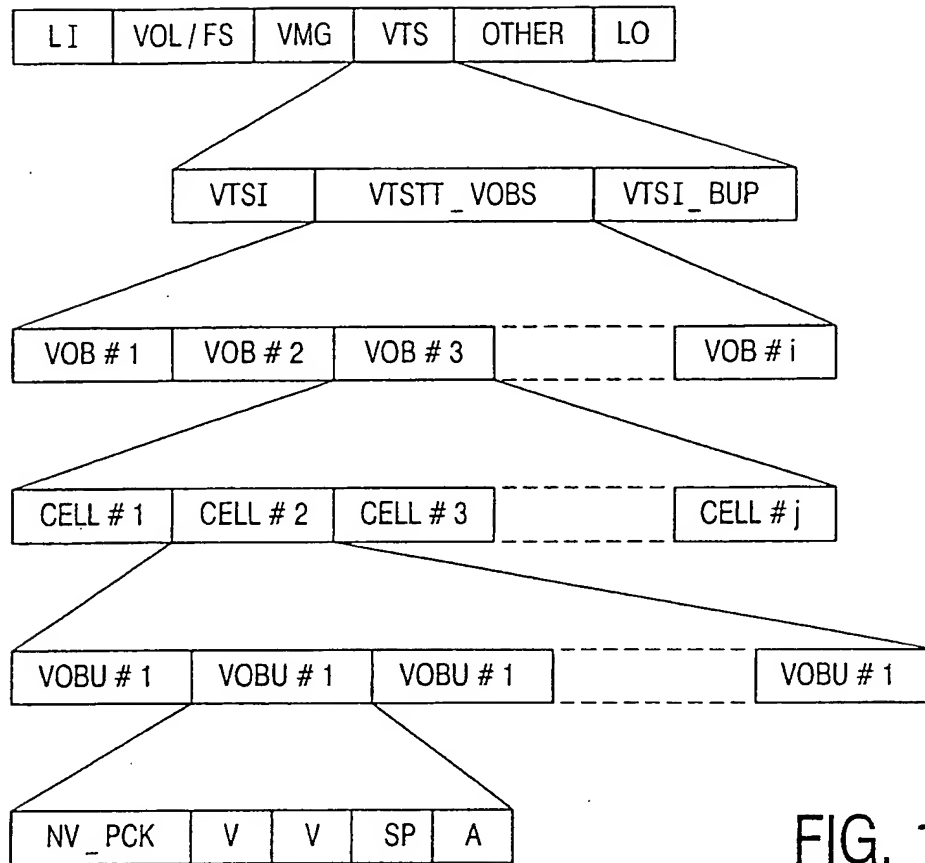


FIG. 1

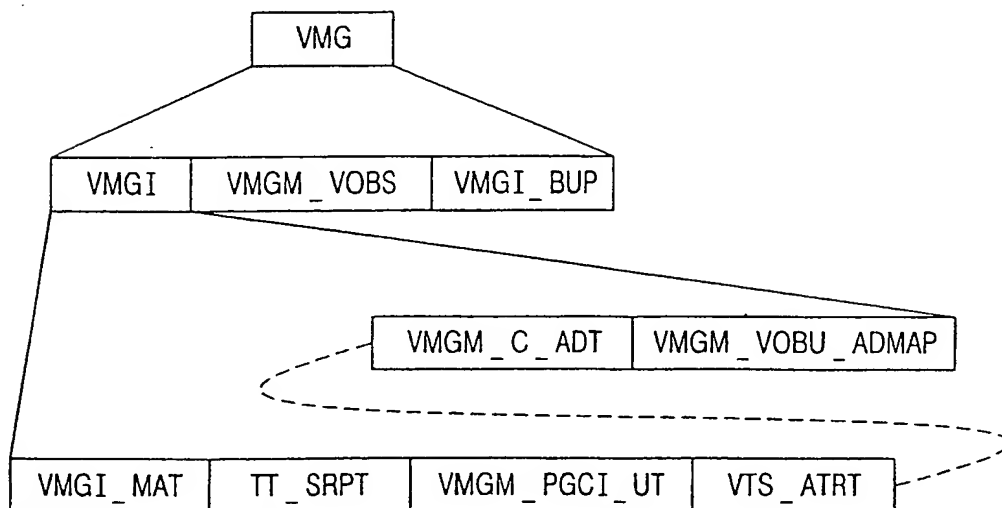


FIG. 2

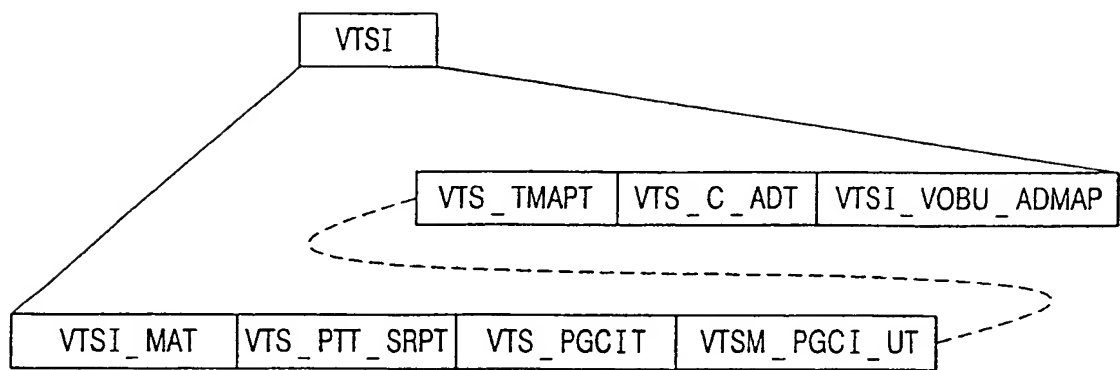


FIG. 3

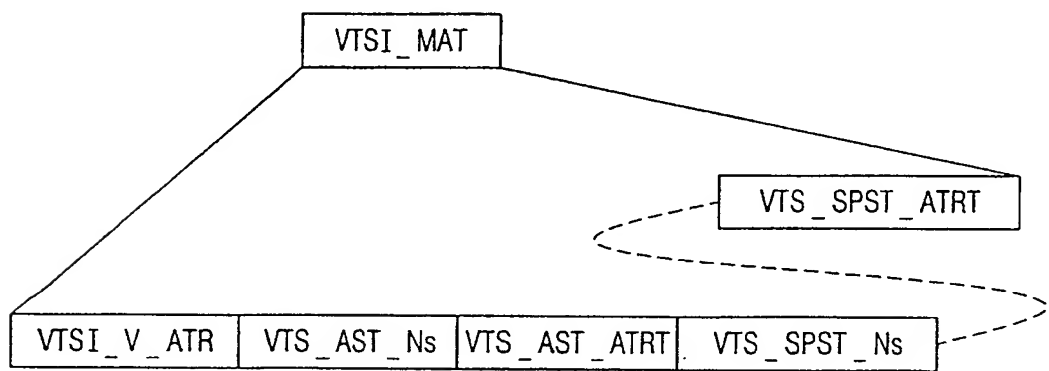


FIG. 4

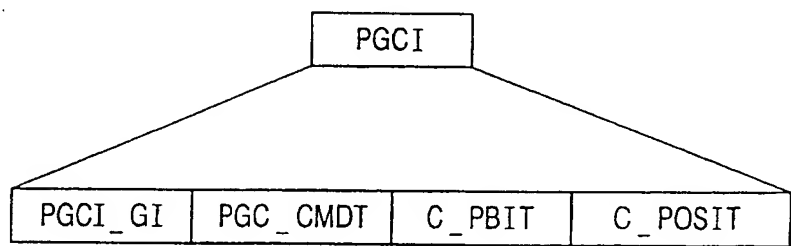


FIG. 5

3/8

		VMGI/TT_SRPT/TT_SRP			VTSI / VTS_PTT_S
		TT_PB_TY	PTT_Ns	VTS_TTN	
PLAYLISTS	EXAMPLE				
	PLAY LIST 1	0000 01x1		1	
	PLAY LIST 2			2	
				..	
	AS ORIGINAL I	0000 0101	4	I	①
				..	
	PLAY LIST K	0000 0101	3	K	②
				..	
	FREE SPACE	0000 0111	1	M	③
				..	
ORIGINALS	PLAY LIST N	0001 01x1		N (< 50)	
	ORIGINAL 1	0000 01x1		N + 1	
	ORIGINAL 2			N + 2	
				..	
	ORIGINAL I	0000 0101	4	N + I	④
				..	
	ORIGINAL K	0000 0101	5	N + K	⑤
				..	
	FREE SPACE	0000 0111	1	N + M	⑥
				..	
	ORIGINAL N	0001 01x1		N + N	

AGL\_Ns == '1'

TT\_PTL\_ID\_FLD == zero

VTSN == '1'

Bit 1 of TT\_PB\_TY indicates free space

FIG. 6A

VTSI / VTS _ PTT _ SRPT / TTUs	
PGCN	PGN
1	1
	..
2	1
..	..
I	1
	2
	3
	4
K	1
	2
	3
M	1
N	1
N	..
N + 1	1
	..
N + 2	1
..	..
N + I	1
	2
	3
	4
N + K	1
	2
	3
	4
	5
N + M	1
N + N	1
	..

FIG. 6B

5/8

VTSI/VTS_PGCIT/VTS_PGCI_SRP	
VTS_TTN	VTS_PGCI_SA
1	
2	
..	
(7) → I	→ ORIGINAL I PGCI
(8) → ..	
(9) → K	→ PLAYLIST K PGCI
..	
(9) → M	→ FREE SPACE M PGCI
..	
N	
N + 1	→ ORIGINAL 1 PGCI
N + 2	→ ORIGINAL 2 PGCI
..	
(10) → N + I	→ ORIGINAL I PGCI
..	
(11) → N + K	→ ORIGINAL K PGCI
..	
(12) → N + M	→ FREE SPACE M PGCI
..	
N + N	→ ORIGINAL N PGCI

Entry type == 1  
 Block mode == 00b  
 Block type == 00b  
 PTL\_ID\_FLD == 0000h

Equal VTS\_PGCI\_SA indicate "no THL"

FIG. 6C

6/8

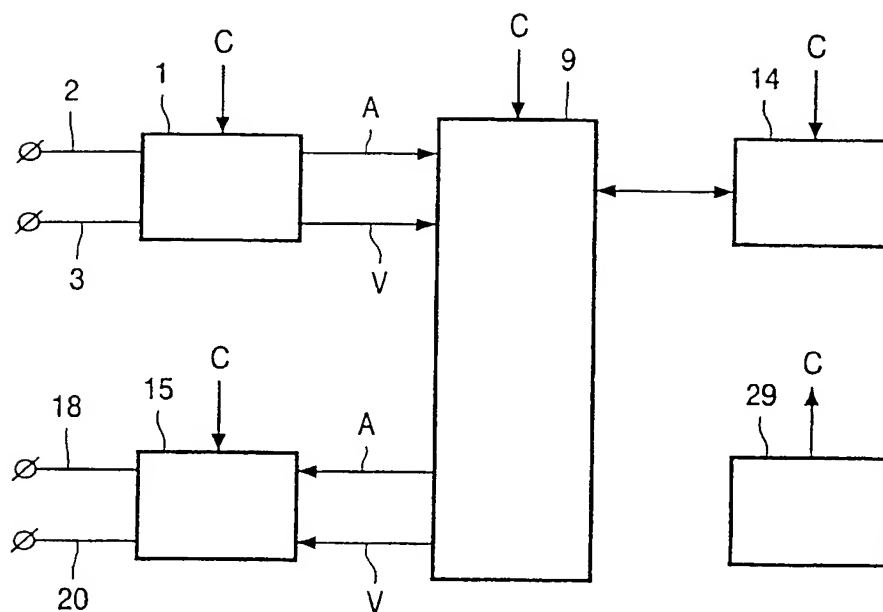


FIG. 7

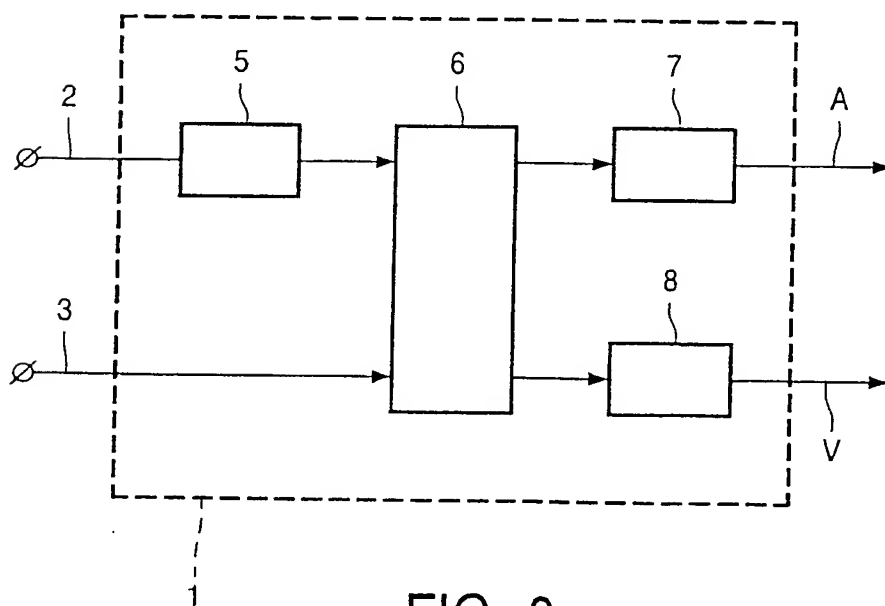


FIG. 8

7/8

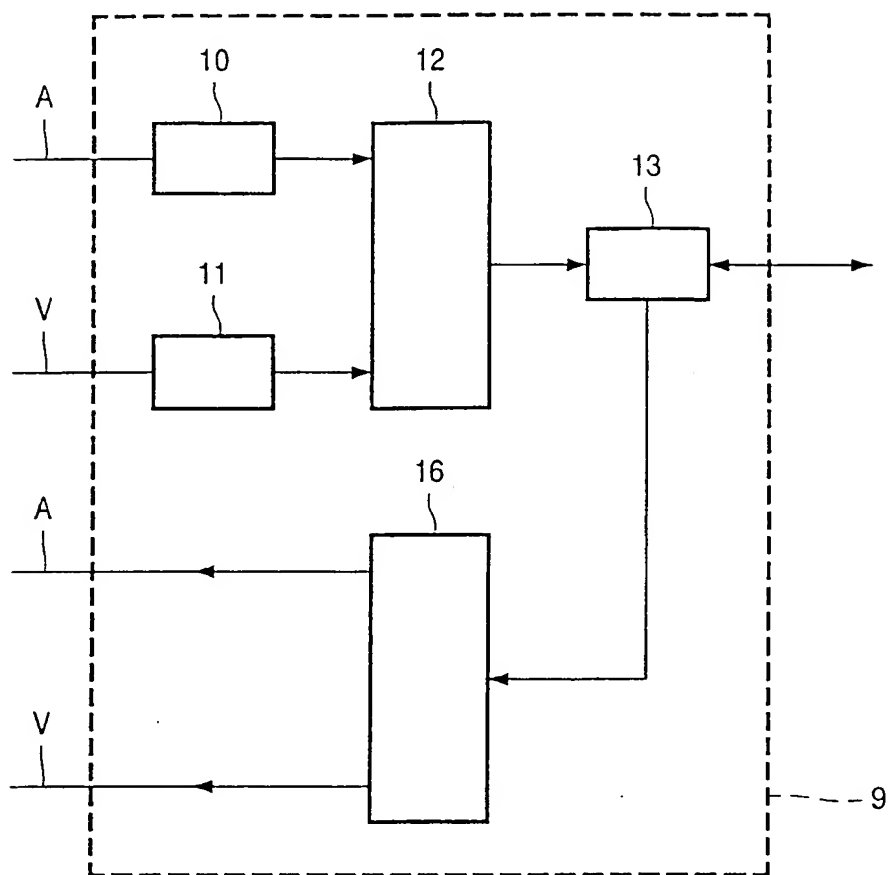


FIG. 9

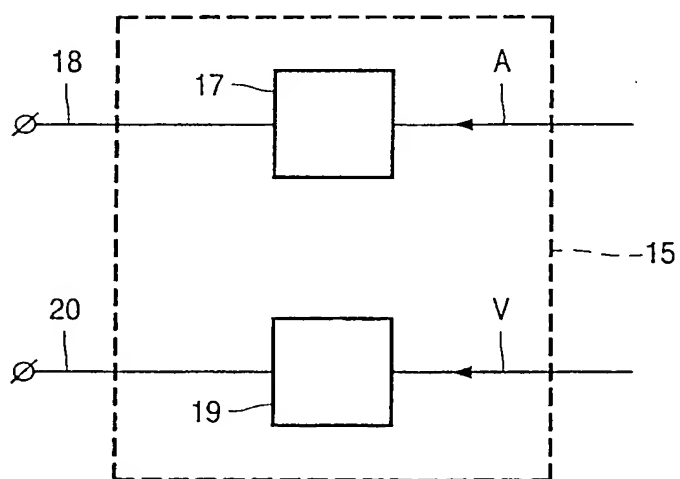


FIG. 10

8/8

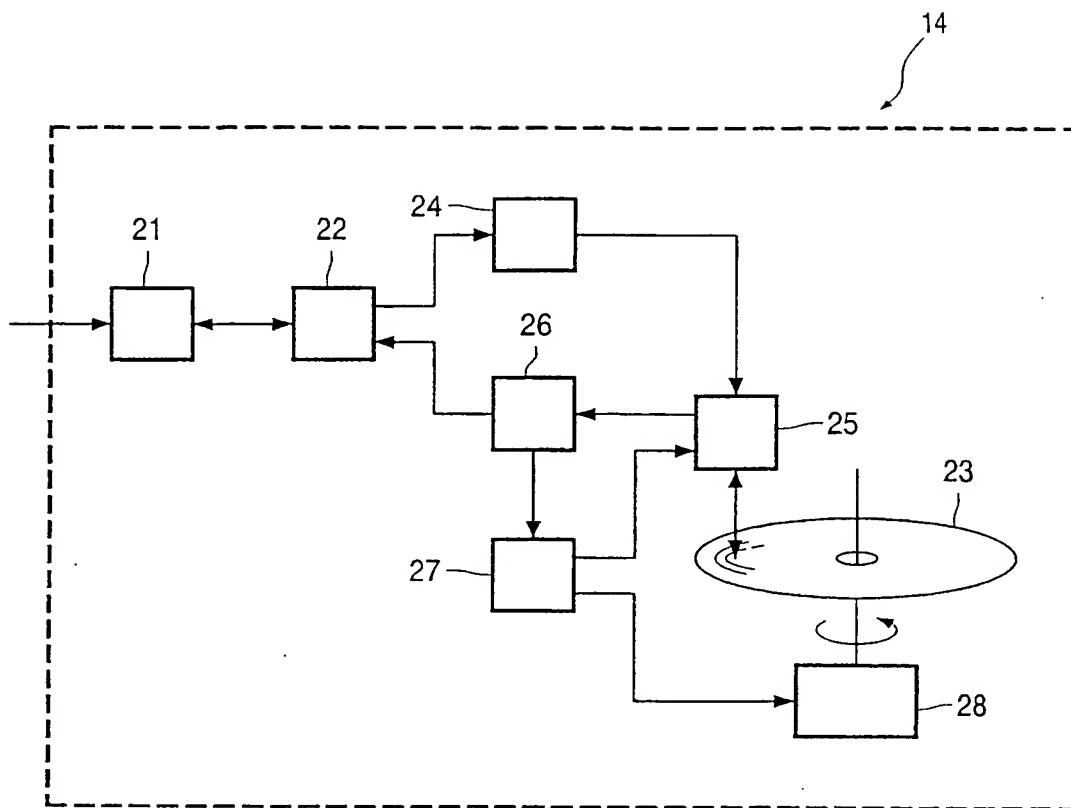


FIG. 11

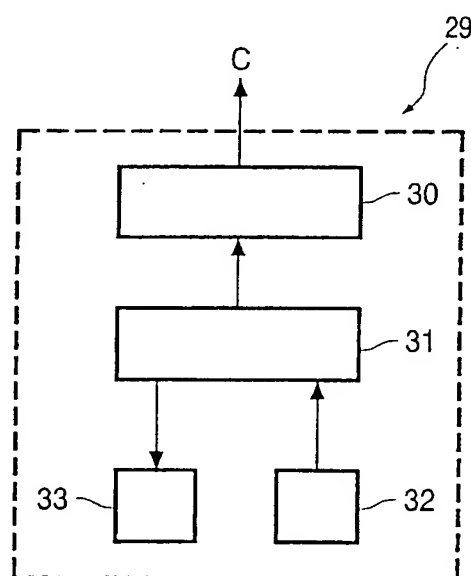


FIG. 12

# INTERNATIONAL SEARCH REPORT

Intern: val Application No

PCT/EP 00/05888

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04N5/85 H04N9/804

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 00 30112 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 25 May 2000 (2000-05-25) page 14, line 12 -page 15, line 31; figures 3-9,20	1,8
P, A	EP 0 942 426 A (NIPPON COLUMBIA CO., LTD.) 15 September 1999 (1999-09-15) page 3, line 4 -page 4, line 34; figures 1-3	1,8

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

28 September 2000

Date of mailing of the international search report

09/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Dudley, C

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/05888

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0030112	A	25-05-2000	NONE	
EP 0942426	A	15-09-1999	JP 11232792 A	27-08-1999

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)